


Installation Guide

Case components

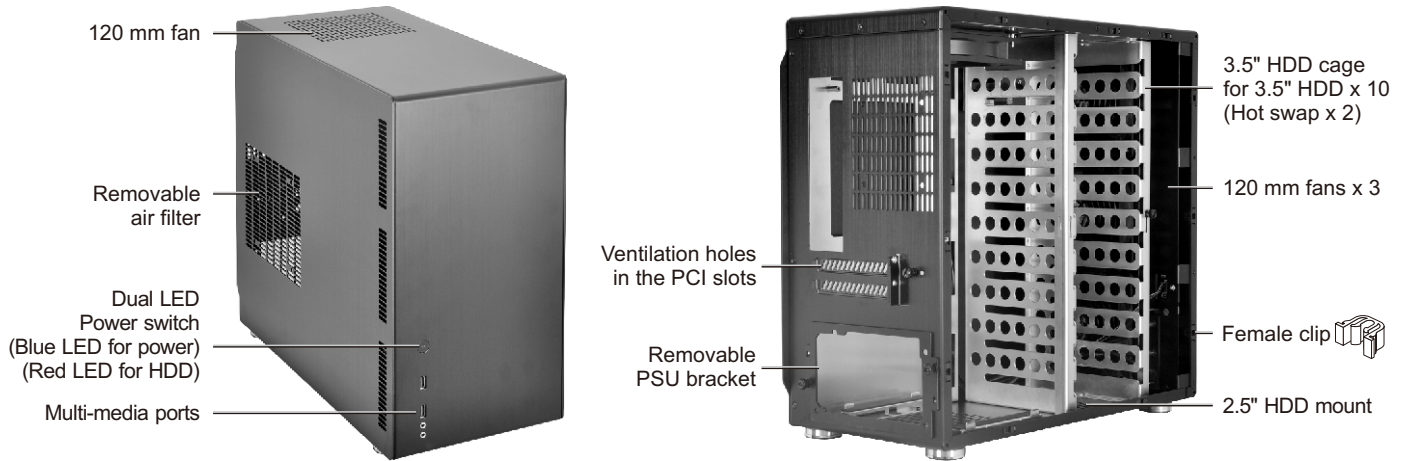

Hardware list


* Extra quantities are spare parts.

	Buzzer (1)		Anti-vibration rubber rings (5) for 2.5" HDD / 3.5" HDD		Thumb screws (44) for 3.5" HDD		Screws (5) for PSU mounting
	Screws M3*9.5 (5) for 2.5" HDD		Anti-vibration silica gel rings (44) for 3.5" HDD		Screws (5) for M/B		Clamp (2)
	Cable ties (1)						

Remove side panels Remove air filters




Pull side panel out to remove.




Reserved hole for installation 120 mm fan (Fan is not included)

Motherboard installation

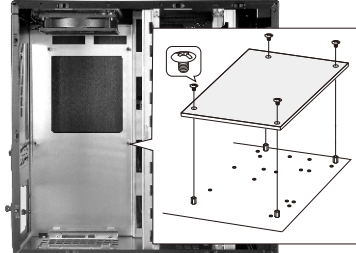

Place the M/B onto the copper bolt and fasten screws to secure.


Removing fan modules



Slide the anti-vibration fan sideways to remove.



2.5" HDD installation




Install screws along with anti-vibration rubber rings onto the HDD.




Slide the HDD into the holes on the HDD platform.


3.5" HDD installation-1 (hot swap)



Install screws along with anti-vibration silica gel rings onto the 3.5" HDD.




Slide the HDD into the HDD cage.




Close the gate to secure the HDD.


PSU installation




Loose 4 thumb screws to remove the PSU mounting bracket.



Assembly power supply with PSU mounting bracket.




Push in gently.



Fasten 4 thumb screws to secure.

Cable management




Press to release.

I/O port installation

HD AUDIO

BLUE 10 9 GREEN
BLACK PURPLE 8 7 KEY
YELLOW 6 5 ORANGE
GRAY 4 3 N.C.
RED 2 1 GND+H.S. TUBE



USB 3.0

Supports motherboard USB 3.0 20 Pin header



Cable installation guide

BLACK / WHITE BLACK POWER SW
BLACK / WHITE + POWER LED
BLACK - POWER LED

BLACK / WHITE - BLACK + HDD LED
RED+ NC
NC NC
Blue SPEAKER